

EXHAUST PURIFICATION



THE EXILENCER™


FOR GREATER
COMFORT AND
CLEAN AIR

PASSIVE
EXHAUST
SYSTEM

REMOVING
SOOT,
FUMES &
CARBON
MONOXIDE

REDUCING
LOW & HIGH
FREQUENCY
NOISE &

NITROGEN
OXIDES - NO_x

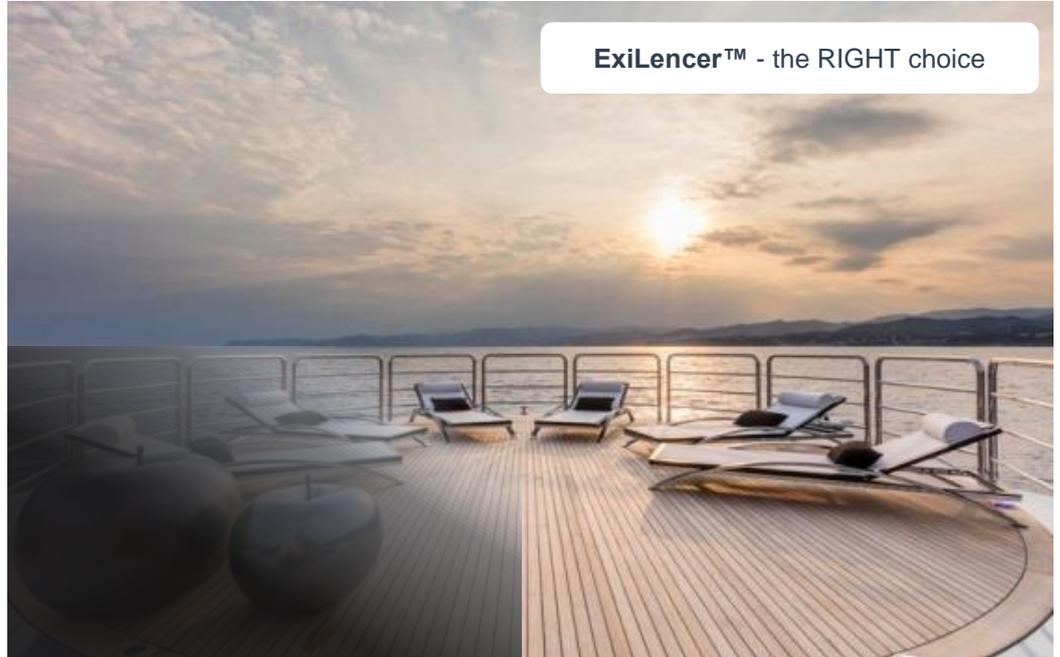

ExiLencer™ - the RIGHT choice

Exhaust gasses can ruin any trip on a yacht – Soot, oily water and smell often cause complaints from families, friends and guests, and are likely also annoyed about the multiple hours spend on cleaning.

The Exilator™ “crew” has worked ambitiously and passionately for years to develop and produce an award winning solution, so you can enjoy the comfort and luxury of clean air – all the time.

Exilator™ has 3 generations of emission and silencer knowledge, and uses well proven technologies from the automotive, mining and space industries, to ensure a pleasant and comfortable journey for everyone.

Exilator™’s passive exhaust purification system, **ExiLencer™**, cleans the air, and protects your yacht and the environment.

The **ExiLencer™** is a combination of 3 technologies:

1. A silencer.
2. **ExiBlock™**, with licensed coating developed by NASA.
3. A special NO_x catalyst.

ExiLencer™ purifies the exhaust by eliminating:

- 98% of the black soot.
- 99% of the carbon monoxide.

In addition the exhaust system noise is reduced with ca. 35dB.

ExiLencer is the RIGHT choice, for those who can afford the luxury of clean air.

EXHAUST PURIFICATION

THE EXILENCER™

FOR GREATER
COMFORT AND
CLEAN AIR

PASSIVE
EXHAUST
SYSTEM

REMOVING
SOOT,
FUMES &
CARBON
MONOXIDE

REDUCING
LOW & HIGH
FREQUENCY
NOISE &

NITROGEN
OXIDES - NO_x



EXILATOR

ExiLencer™ continuously ignites and burns black soot (regeneration), when the exhaust gas temperature is above 325°C. The relative low soot ignition temperature is caused by the special coated ceramics, the **ExiBlock™**'s.

The **ExiLencer™** is delivered with a real-time monitoring system, the **ExiBox™**, with the purpose of keeping engineers informed about system performance.

A standard PC display installed in the engine control room, provides clear and visual status of the **ExiLencer™** performance.

The monitoring system stores data locally, always ensuring availability of real-time and historical exhaust data. There is an option to access data remotely.

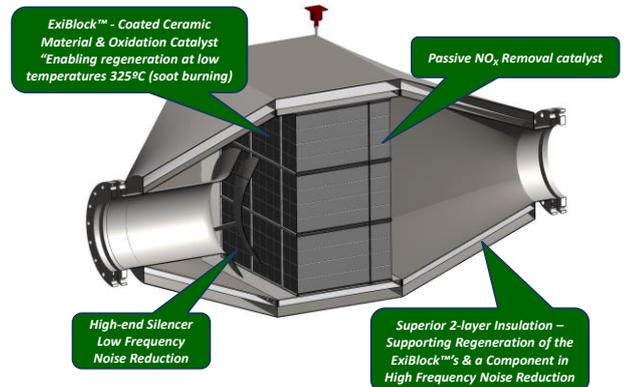

The passive **ExiLencer™** system is compact and requires little maintenance.

- The **ExiBlock™**'s only needs cleaning once a year or after 5,000 hours of operation.
- The **ExiBlock™**'s are re-used 10 to 12 times or more than 50.000 running hours - for some Yachts, the same **ExiBlock™**'s for a lifetime!
- No active parts → no mechanical wear.
- Annual calibration/verification is offered to ensure **ExiLencer™**'s system integrity.
- The system is made of high grade stainless steel.
- **ExiLencer™** is suited for 4-stroke diesel engines, using low sulphur fuel oil.

The **Exilencer™** system is always optimized to the actual engine size and performance.

Simple design guidelines help defining the right size of the **ExiLencer™**. See our recommendations to the right.

ExiBlock™	Engine size [kW]
1	kW < 125
2	125 ≤ kW < 225
4	225 ≤ kW < 400
6	400 ≤ kW < 575
8	575 ≤ kW < 750
12	750 ≤ kW < 1,250
15	1,250 ≤ kW < 1,700
18	1,700 ≤ kW < 2,150